


Order Code: XCFRTSN

GU10 - Fire Rated Recessed Ring Tilt Downlight - Satin Nickel

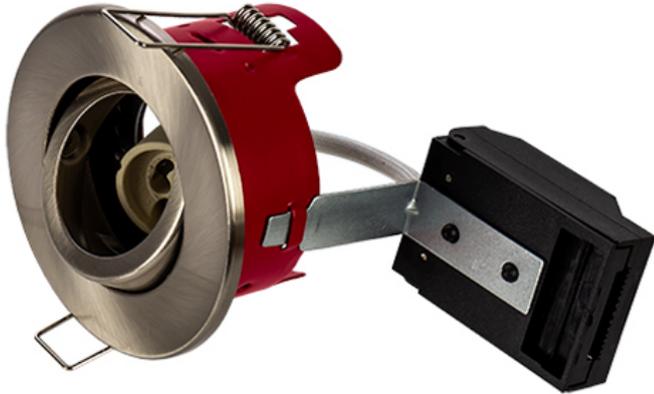

Features

- Ideal for retrofit of existing halogen downlight fixtures
- Available in 3 different coloured bezels
- Fully adjustable tilted lens
- Lamps sold separately
- 30, 60 & 90 minute fire rating with solid timber joists
- 30 minute fire rating with Staircraft I-Joist and METAL WEB Joist [[Compatibility Matrix](#)]
- [Fixed](#), [TILT](#) and [IP65 Shower](#) version available

Construction

- Steel body providing a high level of fire protection in accordance with Building Regulations Part B
- Supplied with GU10 lampholder and bracket



Technical Data

General		Electrical	
Luminaire Wattage (W)	50	Input Voltage Range (VAC)	230
Weight (kg)	1.88		

Order Code: XCFRTSN

GU10 - Fire Rated Recessed Ring Tilt Downlight - Satin Nickel

Dimensions

C (mm)	94
-----	-----
Cut Out (mm)	78
-----	-----
Dia. (mm)	87
-----	-----

Line Drawing

