


**Order Code: XCLS429CTBDM3**

XCITE LINEAR SUSPENDED CCT XCLS - Black - 29W - Dimmable - Emergency - 3000K/4000K/5000K - Opal diffuser

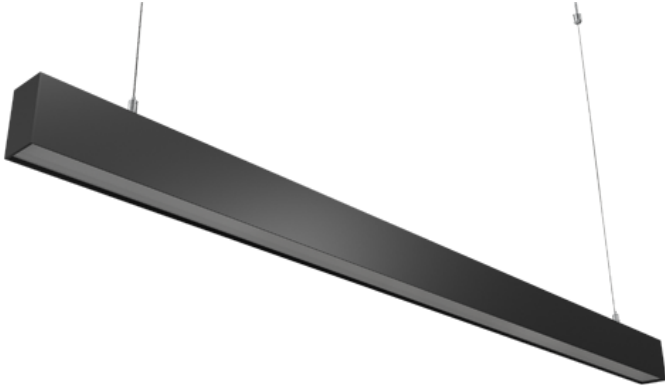

**Features**

- Suitable for offices and schools
- Independently switchable up/down modes with adjustable CCT [3000K/4000K/5000K]
- DALI and push switch dimmable as standard
- Complete with adjustable 1.5m wire suspension and 1.8m power feed
- Up to 109 lumens per watt efficacy

**Construction**

- Opal polycarbonate diffuser
- Emergency option available
- Extruded aluminium body finished in black or white
- Fitted polycarbonate end caps



**Technical Data**

**General**

Luminaire Wattage (W)	29
Weight (kg)	4.36
Operating Temperature (ta °C)	5 to 25

**Light Output**

Lumens (lm)	3200
Efficacy (lm/W)	109

**LED**

CCT (K)	3000K/4000K/5000K
CRI	90
Macadam Ellipses	<5

**Driver**

Driver Current (mA)	700
Forward Voltage (V)	41.3

**Emergency**

Emergency Lumen Operating	514
Emergency Wattage (W)	4

**Electrical**

Rated Input Current (A)	0.13
Power Factor (pf)	0.97
Input Voltage Range (VAC)	220 to 240
Surge Protection (kV)	1
Conductor Size (mm)	0.5 to 2.5
Terminal Type	SLK series 4 to pole grip to wire + 2 to pole grip to wire

**Order Code: XCLS429CTBDM3**

XCITE LINEAR SUSPENDED CCT XCLS - Black - 29W - Dimmable - Emergency - 3000K/4000K/5000K - Opal diffuser

Dimensions

A (mm)	1200
B (mm)	45
C (mm)	70
Fix	975

Line Drawing

