
# xcite LED Lighting
## Data Sheet

**Order Code:** XCMWX1M3

X1 MIDI WALL XCMW - 3000K-6000K + Wattage Selectable - Fixed output - Emergency

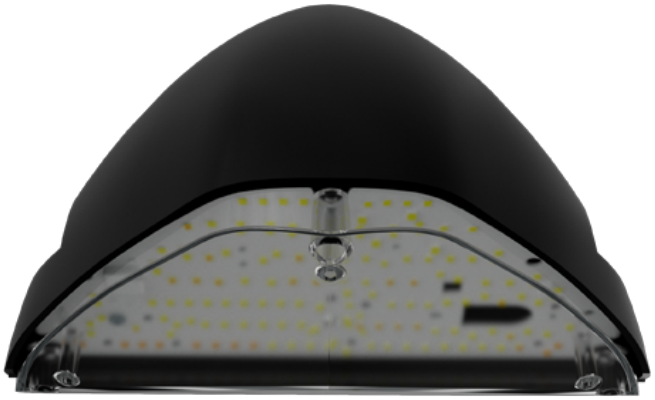

### Features

- **Switchable CCT**
  Enables the required colour temperature to be selected to suit the desired lighting environment.
- **Selectable Wattage**
  Enables the required light output to be selected to suit the application
- **Up to 146 lm/W**
  Delivers high performance illumination while helping to reduce energy consumption.

### Construction

- **IP65**
  Protects against dust and water ingress for reliable performance in demanding environments
- **IK10**
  Provides excellent resistance to impact, helping to maintain long term performance
- **Cast Aluminium Construction**
  Provides a robust, durable housing for long term reliability
- **Side & Rear Cable Entry**
  Provides flexible cable entry options to suit a wide range of installation requirements.

## Technical Data

### General

| | |
|---|---|
| Luminaire Wattage (W) | 7 / 9 / 11 / 13 |
| Weight (kg) | 1.43 |
| Operating Temperature (ta °C) | 5° to 25° |

### Light Output

| | |
|---|---|
| Lumens (lm) | 1000/1300/1600/1800 |
| Efficacy (lm/W) | 146 |

### LED

| | |
|---|---|
| CRI | 82 to 86 |
| Macadam Elipses | 1.5 to 7.5 |

### Driver

| | |
|---|---|
| Driver Current (mA) | 200 / 250 / 300 / 350 |
| Forward Voltage (V) | 29.5 to 31.3Vdc |

### Emergency

| | |
|---|---|
| Emergency Lumen Operating | 151 |
| Emergency Wattage (W) | 1 |

### Electrical

| | |
|---|---|
| Rated Input Current (A) | 0.04 / 0.04 / 0.05 / 0.06 |
| Power Factor (pf) | 0.9 to 0.96 |
| Input Voltage Range (VAC) | 220 to 240 |
| Inrush Current Peak (A) | 10A |
| Surge Protection (kV) | 1kV |
| Conductor Size (mm) | 0.5 to 2.5 |
| Terminal Type | 4 pole piano key |

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

# xcite LED Lighting

## Data Sheet


**Order Code:** XCMWX1M3

X1 MIDI WALL XCMW - 3000K-6000K + Wattage Selectable - Fixed output - Emergency

### Dimensions

| | |
|---|---|
| A (mm) | 137 |
| B (mm) | 260 |
| B (mm) | 214 |

### Line Drawing

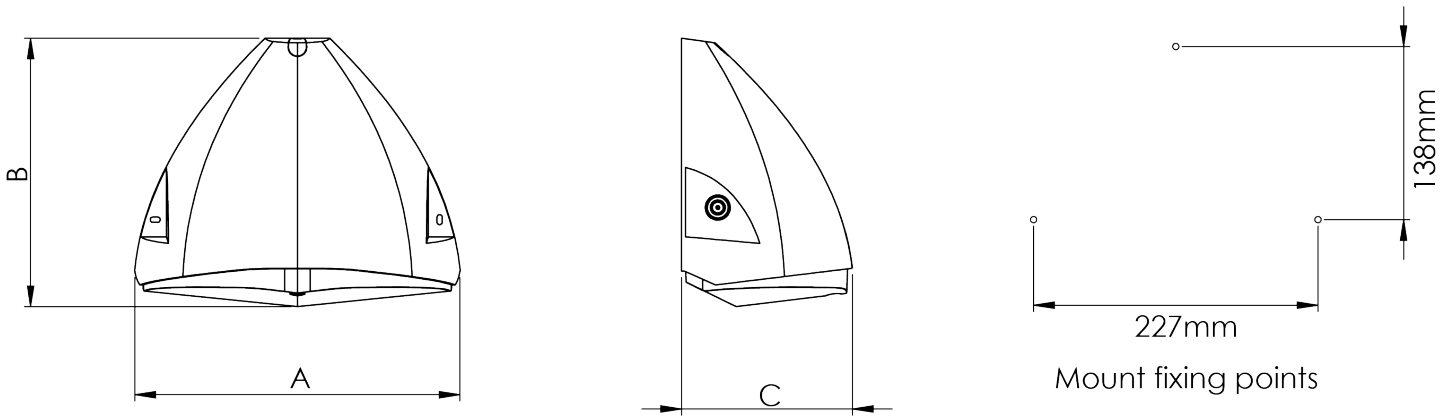


Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk