# xcite LED Lighting
## Data Sheet

**Order Code:** XCSC40NW

40W - Scoop Adjustable Downlight - 4000K



### Features

- Suitable for retail and display areas
- Fully adjustable up to 350° rotation and 45° tilt
- Supplied with polished aluminium reflector - 35º beam angle
- Up to 100 lumens per watt efficacy

### Construction

- Die-cast aluminium body finished in white
- Remote driver
- Supplied as standard with neutral white [4000K] LED

4000K | 50,000 HOURS | 3YRS WARRANTY | IP20 | IK02

## Technical Data

### General

| | |
|---|---|
| Luminaire Wattage (W) | 40 |
| Weight (kg) | 1.14 |
| Operating Temperature (ta °C) | -10 to 40 |

### Light Output

| | |
|---|---|
| Lumens (lm) | 4000 |
| Efficacy (lm/W) | 100 |

### LED

| | |
|---|---|
| CCT (K) | 4000 |
| CRI | 80 |
| Macadam Elipses | 4 |

### Driver

| | |
|---|---|
| Driver Current (mA) | 950 |
| Forward Voltage (V) | 24 - 42 |

### Electrical

| | |
|---|---|
| Rated Input Current (A) | 0.27 |
| Power Factor (pf) | 0.9 |
| Input Voltage Range (VAC) | 220 - 240 |
| Inrush Current Peak (A) | 24.9 |
| Surge Protection (kV) | 1 |
| Conductor Size (mm) | 1.5 |
| Terminal Type | 2-pole screw down |

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

# xcite LED Lighting
## Data Sheet


**Order Code:** XCSC40NW

40W - Scoop Adjustable Downlight - 4000K

### Dimensions

| | |
|---|---|
| Depth (mm) | 145 |
| Cut Out (mm) | 155 |
| Dia. (mm) | 163 |

### Line Drawing

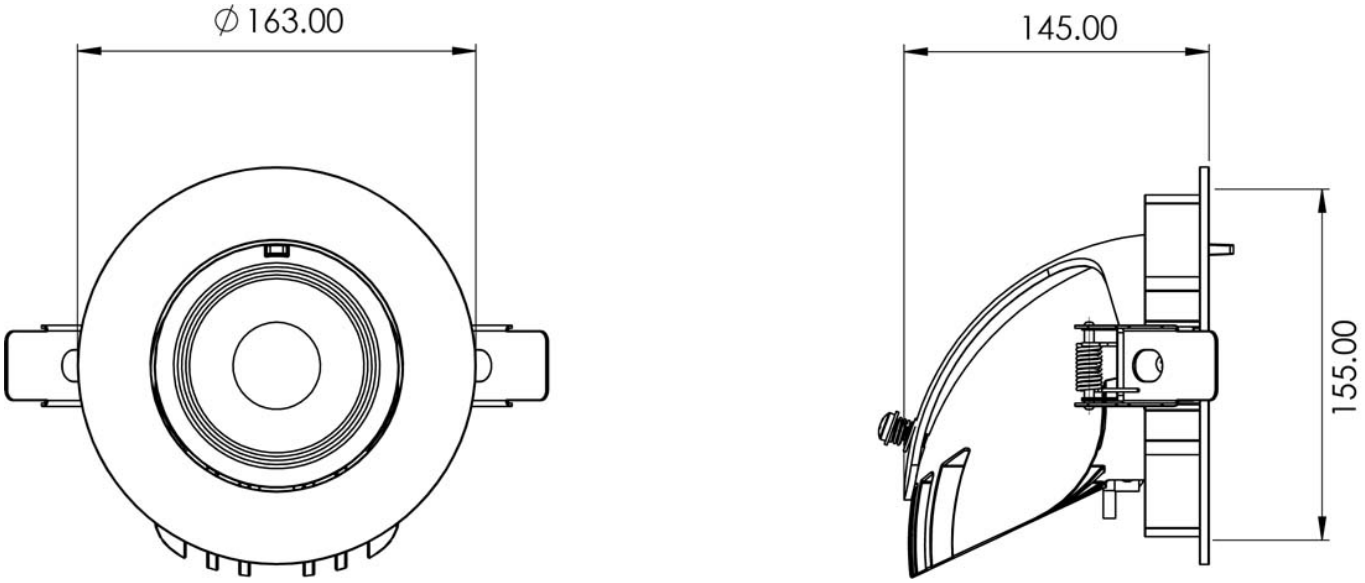


Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk