


Order Code: XCTDL3CTW

TRIANGLE CABINET LIGHT CC Cabinet/Shaver Lights 3W - 3000K-4000K

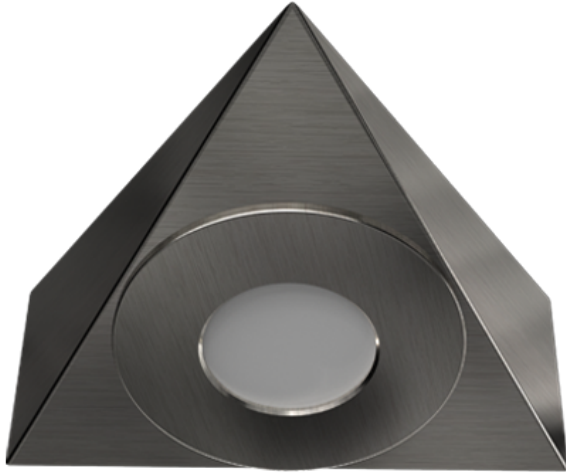

Features

- LED Triangular under cabinet downlight suitable for kitchen areas
- Surface mounted
- CCT adjustable via 2-way selector switch [3000K/4000K]
- Complete with 1.5m of mains, 2 core cable

Construction

- Pressed steel body
- Frosted polycarbonate diffuser
- Integral driver circuitry with mains input



Technical Data

| General | | Electrical | |
|-------------------------------|-------------|---------------------------|-------------|
| Luminaire Wattage (W) | 3 | Rated Input Current (A) | 0.03 |
| Weight (kg) | 0.19 | Power Factor (pf) | 0.42 |
| Operating Temperature (ta °C) | -20 to 50 | Input Voltage Range (VAC) | 220-240 |
| Light Output | | Inrush Current Peak (A) | 110 |
| | | Surge Protection (kV) | 0.5kV |
| | | Conductor Size (mm) | 0.5 |
| Lumens (lm) | 240 | Terminal Type | 2 core flex |
| Efficacy (lm/W) | 80 | | |
| LED | | | |
| CCT (K) | 3000K/4000K | | |
| CRI | 80 | | |
| Macadam Ellipses | <5 | | |
| Driver | | | |
| Driver Current (mA) | 120 | | |
| Forward Voltage (V) | 18 | | |

Order Code: XCTDL3CTW

TRIANGLE CABINET LIGHT CC Cabinet/Shaver Lights 3W - 3000K-4000K

Dimensions

| | |
|--------|-----|
| A (mm) | 117 |
| B (mm) | 123 |
| C (mm) | 45 |

Line Drawing

