xcite LED Lighting
Data Sheet

Order Code: XCTDL3WWW

3W - Triangular Cabinet Light - IP20 - 3000K - White



Features

- LED Triangular under cabinet downlight suitable for kitchen areas
- Surface mounted
- Complete with 0.5m of mains, 2 core cable

Construction

- Pressed steel body
- Frosted polycarbonate diffuser
- Integral driver circuitry with mains input
- Available in warm white [3000K] or neutral white [4000K]

3000K | 4000K | 50,000 HOURS | 3YRS WARRANTY | IP20 | IK04

Technical Data

General

Luminaire Wattage (W)	3
Weight (kg)	0.20
Operating Temperature (ta °C)	0 to 25

Light Output

Lumens (lm)	200
Efficacy (lm/W)	67

LED

CCT (K)	3000
CRI	80
Macadam Elipses	3

Electrical

Rated Input Current (A)	0.011
Power Factor (pf)	0.4
Input Voltage Range (VAC)	220-240
Surge Protection (kV)	2
Conductor Size (mm)	0.5
Terminal Type	Bare wire

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk

Generated on: 29/11/2026 4:00am
Produced by xcite LED Lighting

xcite LED Lighting

Data Sheet


Order Code: XCTDL3WWW

3W - Triangular Cabinet Light - IP20 - 3000K - White

Dimensions

Length (mm)	124
Width (mm)	124
Depth (mm)	40

Line Drawing

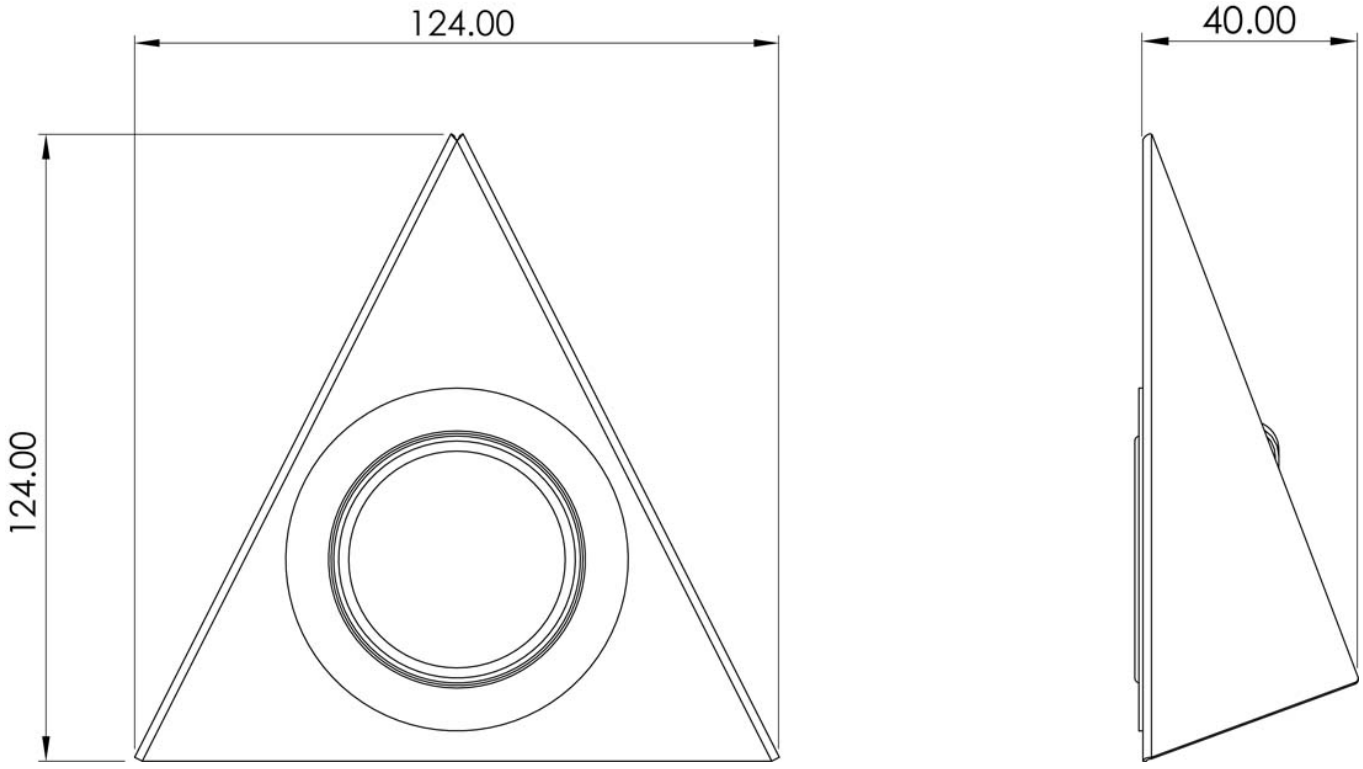

Technical
Stafford Park 12
Telford, Shropshire,
TF3 3BJ

T: +44 (0)1952 292441
E: sales@xciteledlighting.co.uk
W: www.xciteledlighting.co.uk