

EXPLORER RL



Easy access for installation

Impact resistance - IK10

Up to 108 lumens per Watt efficacy



Lighting for
a Living

EXPLORER RL



- Modern road lantern for car parks or urban areas
- Impact resistance - IK10
- CRI: Ra>80
- Up to 108 lumens per Watt efficacy
- 50,000 hours lifetime (L70/B50)

5 YR

IP65




IK10

High efficiency road lantern

Order Code	Description	lm	W	lm/W	kg
EXPRL102NW	31W - 4000K	3100	31	100	5.60
EXPRL103NW	37W - 4000K	3800	37	103	5.60
EXPRL105NW	61W - 4000K	6600	61	108	5.90
EXPRL207NW	97W - 4000K	10800	97	111	10.60
EXPRL208NW	114W - 4000K	11900	114	104	10.90
EXPRL210NW	127W - 4000K	13500	127	106	10.90

Dimensions

Order Code	A (mm)	B (mm)	C (mm)
EXPRL102NW	644	303	132
EXPRL103NW	644	303	132
EXPRL105NW	644	303	132
EXPRL207NW	864	375	168
EXPRL208NW	864	375	168
EXPRL210NW	864	375	168

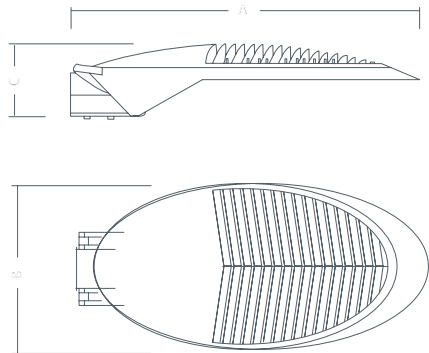

CONSTRUCTION

- Die-cast aluminium body finished in grey (RAL 9023 & 7040)
- 4mm thick toughened glass
- Suitable for post top and side entry EXPRL102NW/103 & 105 - 48mm-60mm spigot mounting
- EXPRL207NW/208 & 210 - 60mm-76mm spigot mounting
- Supplied as standard with neutral white (4000K) LED

OPTIONS


WW	Warm white (3000K)
DL	Daylight (6500K)

INSTALLATION NOTES

Suitable for post top and side entry spigot mounting, and wired 3-way connection block

TO SPECIFY

High efficiency street lantern as per EXPLORER RL range

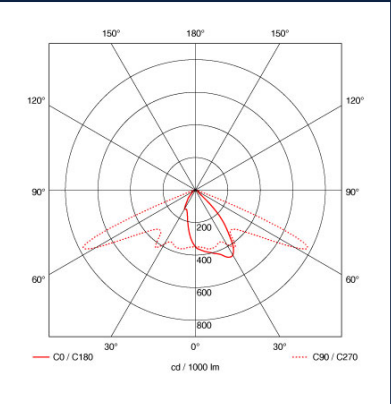

Lighting for a Living

Tamlite Lighting Sales Centre

Tamlite Field Sales Centre,
Park Farm Industrial Estate,
Redditch, Worcestershire,
B98 0HU

T. 01527 517 777
E. sales@tamlite.co.uk
W. tamlite.co.uk

Over 50 years lighting for a **Living**

As a UK manufacturer we have one of the widest lighting ranges across:



Communal



Education



Emergency



Healthcare



Industrial



Office



Retail
& Leisure



Sports



Urban



Warehouse
& Logistics